

# Technical data sheet

## Cable and pipe spacer clip 733 G

Item number: 1361384



- \* Size M16 is not suitable for nail device
- \* Sizes M16 - PG16 are not suitable for bolt-firing tool



**St** Steel

**G** Electrogalvanized

### Master data

|                     |                            |
|---------------------|----------------------------|
| Item number         | 1361384                    |
| Type                | 733 38 G                   |
| Description 1       | Distance saddle            |
| Description 2       | with slot                  |
| Manufacturer        | OBO                        |
| Dimension           | 30-38mm                    |
| Material            | Steel                      |
| Surface             | Electrogalvanized          |
| Surface standard    | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit | 25                         |
| Unit of quantity    | Piece                      |
| Weight              | 3.87 kg                    |
| Weight unit         | kg/100 pc.                 |


# Technical data sheet

## Cable and pipe spacer clip 733 G

Item number: 1361384



### Dimensions

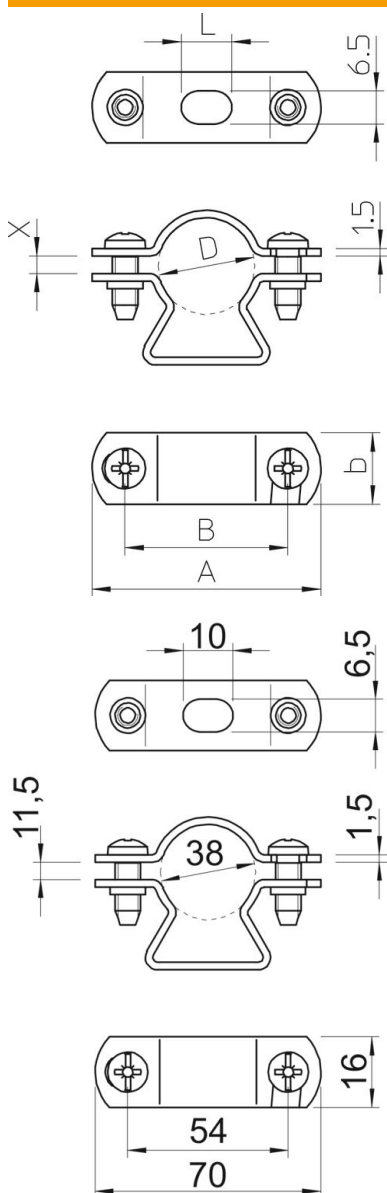

|             |         |
|-------------|---------|
| Length      | 70 mm   |
| Dimension A | 70 mm   |
| Dimension B | 54 mm   |
| Dimension b | 16 mm   |
| Dimension D | 38 mm   |
| Dimension L | 10 mm   |
| Dimension x | 11.5 mm |

### Technical data

|                        |            |
|------------------------|------------|
| Distance to the wall   | yes        |
| Number of cables/pipes | 1          |
| Version for            | Closed     |
| Fastening type         | Screw hole |
| For diameter           | 38         |

# Technical data sheet

## Cable and pipe spacer clip 733 G

Item number: 1361384



### Technical data

|                                  |             |
|----------------------------------|-------------|
| Suitable in fire protection area | yes         |
| Size                             | M32         |
| Halogen-free                     | yes         |
| Plastic-covered                  | no          |
| Hole size                        | 6,5 x 10 mm |
| Material thickness               | 1.5 mm      |
| Bolt                             | M5 x 18     |
| Clamping range D, max.           | 38 mm       |
| Clamping range D, min.           | 30 mm       |
| UV-resistant                     | yes         |