


# Technical data sheet

## Cross-over 110 FS

Item number: 7027355



Cross-over for the creation of a horizontal branch, fitting for lock and screw-on cable trays of side height 110 mm. Screwless mounting with double clamps or screw connection with FRS truss-head screws and M6 combination nuts. Can be used in indoor areas. Fastening material must be ordered separately.

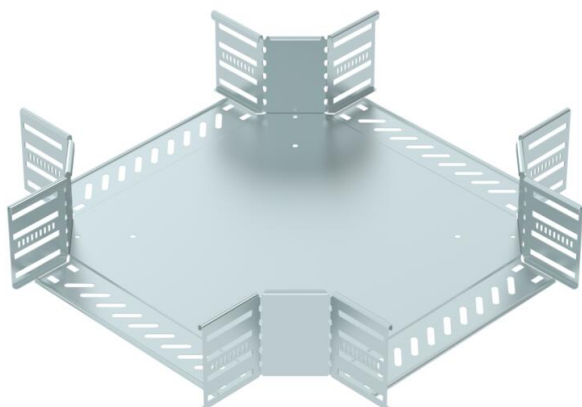

**St** Steel

**FS** Strip galvanized

### Master data

|                     |                  |
|---------------------|------------------|
| Item number         | 7027355          |
| Type                | RK 130 FS        |
| Description 1       | Cross over       |
| Description 2       | for cable tray   |
| Manufacturer        | OBO              |
| Dimension           | 110x300          |
| Material            | Steel            |
| Surface             | Strip galvanized |
| Surface standard    | DIN EN 10346     |
| Smallest sales unit | 1                |
| Unit of quantity    | Piece            |
| Weight              | 264.2 kg         |
| Weight unit         | kg/100 pc.       |


# Technical data sheet

## Cross-over 110 FS

Item number: 7027355



### Dimensions

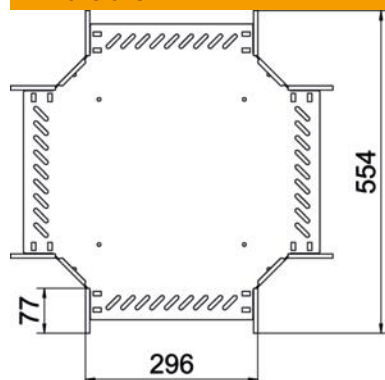

|                 |        |
|-----------------|--------|
| Width           | 300 mm |
| Height          | 110 mm |
| Plate thickness | 1 mm   |
| Dimension B     | 300 mm |
| Dimension R     | 50 mm  |

### Technical data

|   |                      |
|---|----------------------|
| Connector version                       | Integrated connector |
| Maintain electrical functions           | no                   |
| Material thickness, floor plate         | 1 mm                 |
| NATO hole pattern                       | no                   |
| Rustproof steel, pickled                | no                   |
| Permitted temperature range, max.       | 120 °C               |
| Permitted temperature range, min.       | -20 °C               |
| Wide-span version                       | no                   |
| Type of connector, cable support system | screwed/clamped      |
| Recommended quantity of bolts           | 44 St.               |
| Rail thickness                          | 1.25 mm              |