

# Technical data sheet

UDHOME2 floor socket, with stainless steel cover, equipped

Item number: 7368393



Square installation unit for use in dry-care cavity and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 75 mm, the height-adjustment range +20 mm.

The scope of delivery contains one BS socket with switch and a mounting support for up to two LJ6C data modules.

Surfaces visible in the floor covering made of brushed stainless steel.

The load-bearing capacity of 15 kN is only guaranteed when in an unused state.



**A2** Stainless steel

**GUF** Brushed and laminated

## Master data

Item number	7368393
Type	UDHOME2 BV BS
Description 1	Floor socket, complete
Description 2	with BS socket, VA cover
Manufacturer	OBO
Dimension	125x125x75
Material	Stainless steel
Surface	Brushed and laminated
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	185 kg
Weight unit	kg/100 pc.


# Technical data sheet

UDHOME2 floor socket, with stainless steel cover, equipped


Item number: 7368393



## Dimensions

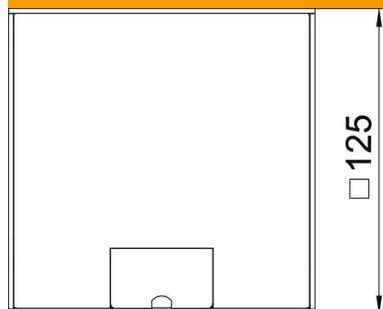

Dimension h 75 mm

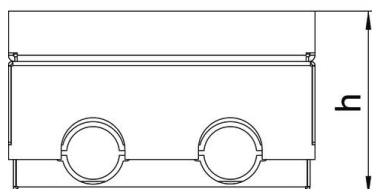

## Technical data

Number of mounting boxes	1
Version for	Square
Cable outlet version	Swivellable cord outlet
Floor care	Dry
Floor height, max.	95 mm
Floor height, min.	75 mm
Suitable for wet care	no
Height-adjustment range, max.	95 mm
Height-adjustment range, min.	75 mm
Opening mechanism	Tool