

# Technical data sheet

## US 3 support FT

Item number: 6342370



Suspended support (U profile) of dimensions 50 x 30 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.



**St** Steel

**FT** Hot-dip galvanised

### Master data

Item number	6342370
Type	US 3 K 110 FT
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	50x30x1100
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Piece
Weight	175.9 kg
Weight unit	kg/100 pc.


# Technical data sheet

## US 3 support FT

Item number: 6342370



### Dimensions

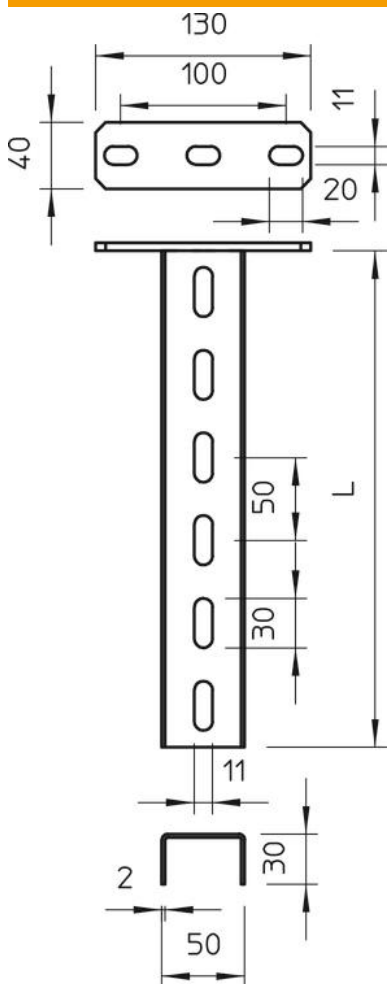

Length	1,100 mm
Length	3.6 ft
Width	50 mm
Height	30 mm
Plate thickness	0.08 in
Dimension L	1,100 mm

### Loads



### Chara



Max. total  
= 10 cm  
of ETA(a)

### Technical data

Version for	U profile
Bracket length 200	2.1 kN
Bracket length 400	1.1 kN
Maintain electrical functions	yes
Material thickness	2 mm
Maximum tensile load	5 kN
With tothing	no