

Technical data sheet

Bolt tie BZ-U

Art.-Nr. 3498334



Bolt tie BZ for the anchoring of medium-duty to heavy-duty loads, both in cracked and non-cracked concrete. It combines high approved loads with small edge distances and axial spacings.


| | |
|-----------|-------------------|
| St | Steel |
| G | Electrogalvanised |

| | |
|--------------------------------------|---|
| Additional product text, instruction | European Technical Approval ETA-99/0010, including characteristic values under fire exposure to fire resistance R 120. Proof of suitability in the case of seismic impacts, categories C1 and C2. Shock approval by the Federal Office for Civil Protection in Bern, Switzerland. |
|--------------------------------------|---|

Master data

| | |
|---------------------|-------------------|
| Item no. | 3498334 |
| Type | BZ-U 10-10-30/90 |
| Description 1 | Wedge anchor BZ-U |
| Dimension | M10x90mm |
| Material | Steel |
| Material symbol | St |
| Surface | Electrogalvanised |
| Surface to DIN | DIN EN 12329 |
| Surface symbol | G |
| Smallest sales unit | 50,00 Piece |
| Weight | 6,72 kg/100 pc. |

Technical data

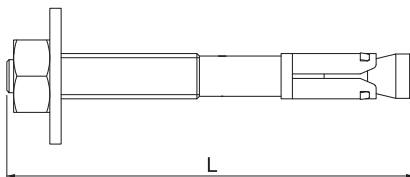

| | |
|------------------------------------|-------------------------------------|
| Length | 90,00 mm |
| Dimension L | 90,00 mm |
| Version | For knocking in |
| Anchor/nail/bolt version | Spreading anchor |
| Drill hole depth | 75,00 mm |
| Drill hole diameter | 10,00 mm |
| Clamping range | 10-30 mm |
| Clamping strength | 10,00 mm |
| Thread | M10 |
| Thread type | Metric |
| Thread metric | 10,00 |
| Permitted load range, tension zone | 4,30 kN |
| Approvals available | <input checked="" type="checkbox"/> |